


M0DGQ

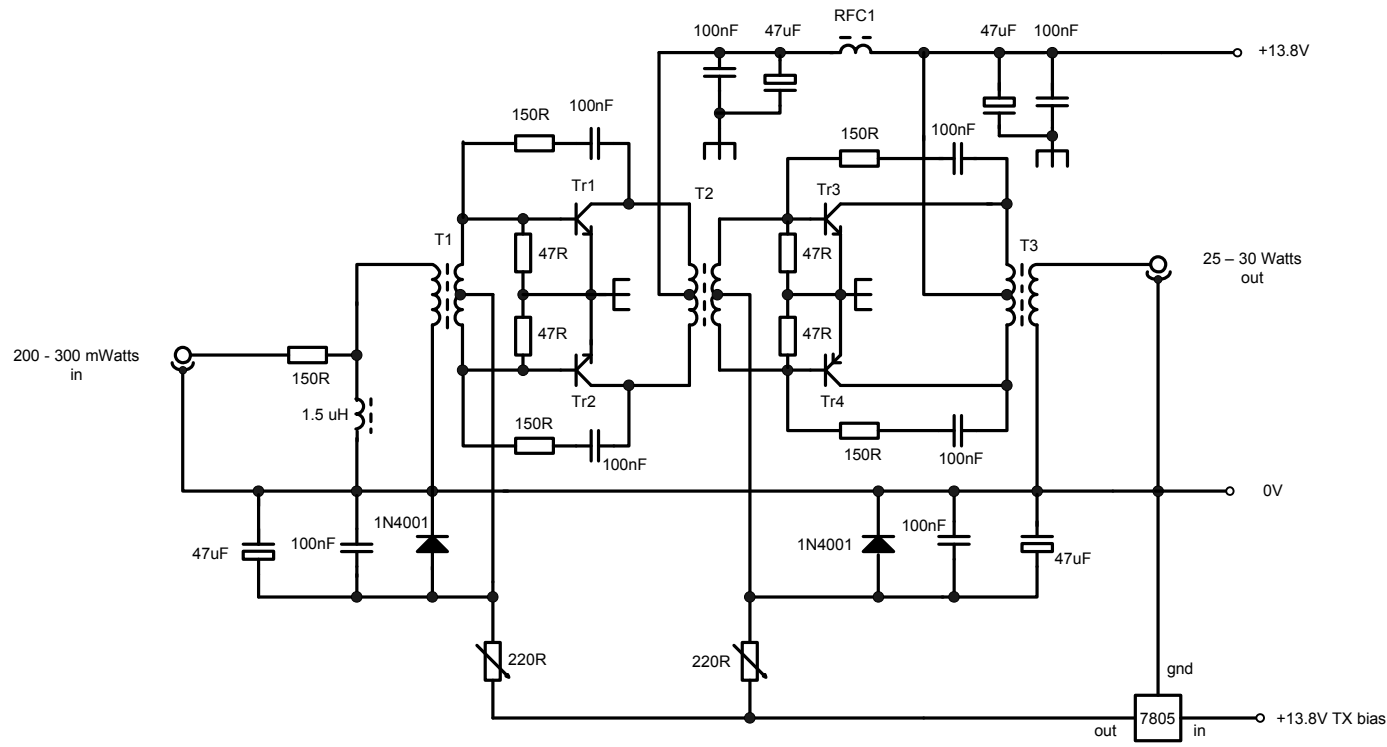

T1 = 8t primary
30 swg enamelled
Cu
2t+2t secondary
30 swg enamelled
Cu
Core = 2 X 2
stacked FT37-43
ferrite cores



T2 = 2+2t primary
30 swg enamelled
Cu
2+2t secondary 30
swg enamelled Cu
Core = 2 X 2
stacked FT50-43
ferrite cores

T3 = 2t primary,
Center tapped 1mm
PVC covered hook
up wire.
4t secondary
0.7mm PVC
covered hook up
wire.
Core = 2 X 4
stacked
FT50-43 ferrite
cores

RFC1 = 10t 22swg
enamelled Cu on
FT37-43
Ferrite core

Tr1, Tr2 = 2SC2166,
2SC1078 etc. matched
pair
Standing current = 15mA
each (30mA total)

Tr3, Tr4 = 2SC1969,
2SC1945 etc. matched
pair
Standing current = 30mA
Each (60mA total)

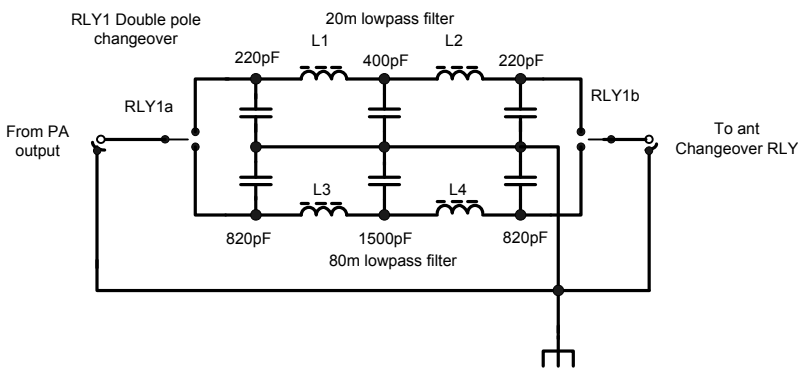

L1, L2 = 12t 22swg
enamelled Cu on T50-6
yellow core

L3, L4 = 22t 22swg
Enamelled Cu on T50-2
Red core

